

# SINGLE ANCHOR POINTS ON DEEP DECK


## RAP GLOBE

RAP GLOBE SINGLE ANCHOR POINTS ARE PERMANENT ANCHORS FOR FALL PROTECTION, INSTALLED ON THE SURFACE OF A STRUCTURE. THE ANCHOR POINTS ARE SUITABLE FOR ONE USER AT A TIME. THE USER IS SECURED DIRECTLY TO THE 360° ROTATING SAFETY EYE OF THE ANCHOR POINT ITSELF.

### Installation

RAP Globe anchor points are installed to the roof by means of the aluminum XSBase plate. Installation on a steel deep deck profile, with a minimum thickness of 0,75 mm (22 gauge), occurs with one AISI 316 mechanical anchor with an M12 thread end. This method of installation minimizes the chance of damages and leakages.

All XSPlatforms single anchor point systems are designed, tested and certified in accordance to the latest European standards EN 795:2012 type A.

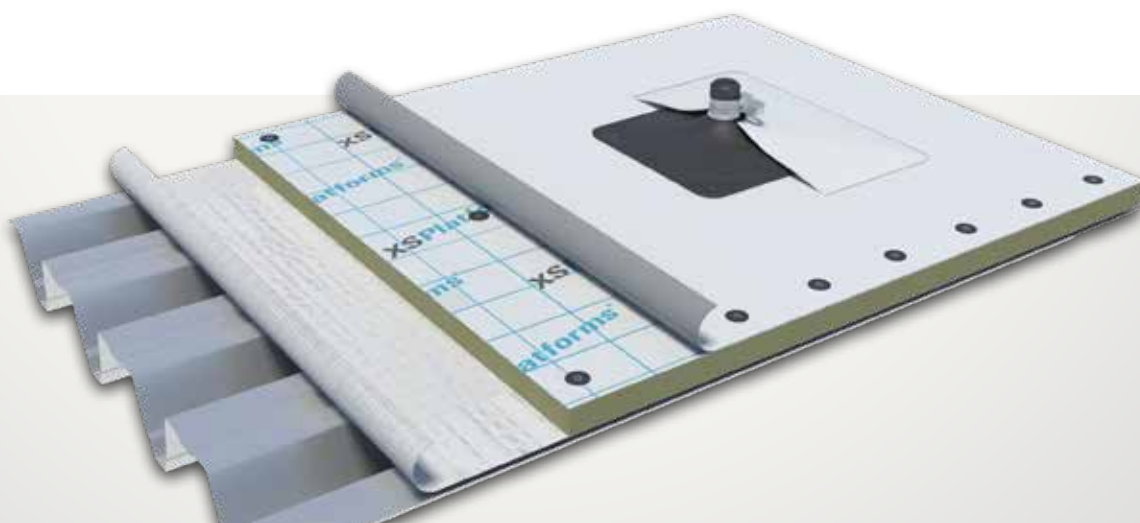

## SPECIFICATIONS

- > Steel deep deck profiles
- > Min. thickness of 0,75 mm (22 gauge)
- > Single anchor installation (M12)
- > Max. roof pitch of 10°
- > Anchorage eye with 360° rotation
- > Suitable for 1 user
- > Suitable for fall arrest and fall restraint
- > Durable stainless steel components
- > EN 795:2012 type A

